











		FRUUTLESS. Proximity Card Electronic Deadbolt	
	ANSI/BHMA Grade 2 security		
	Works with RFID cards		
	Ideal for garage entry doors, home offices, computer rooms, utility rooms, etc.		RFID Card
	Works with standard door preparations and can be installed with a screw driver in a few minutes without		Size (WxL) :
	running wires		2-1/8" x 3-3/8" 54 mm x 86 mm
	Back-up keyway override		System :
	Sturdy construction backed by 25 year mechanical and 1 year electrical warranty		MIFARE Ultralight" ISO 14443A
	Illuminated keypad		13.56 MHz
\bigcirc	Low battery indicator		
Produ	ct Specification		

Product Specification

RFID Cards :	2 (Maximum capacity : 10 cards)	
User codes: 4-6 digit number combination (Maximum capacity :10 set		
Programming code :	6 digit number combination (only 1 set)	
Key :	2	
Size (WxHxD) :	Outer body : 2-3/4" x 5-11/16" x 1" Inner body : 3-1/8" x 6-27/32" x 2-1/32"	
Finish :	Satin Nickel, Aged Bronze, Bright Brass, Antique Brass	
Door bored hole :	2-1/8"(54 mm) or 1-1/2"(38 mm)	
Door thickness :	1-3/8"(35 mm) to 2"(51 mm)	
Adjustable backset :	2-3/8"(60 mm) or 2-3/4"(70 mm)	
Keypad LED color :	Blue	
Power :	DC 6V (Four AA 1.5V alkaline batteries)	
Operation temperature :	-31°F to 150.8°F (-35°C to 66°C)	












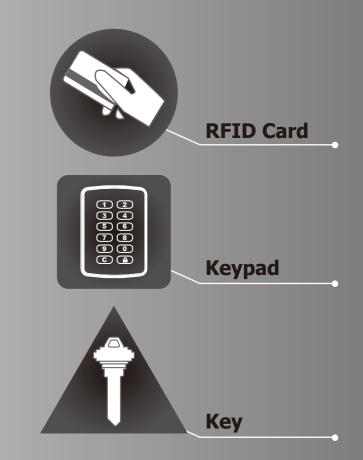

Special Functions

- Automatic bolt direction determination (door handing)
- Multiple user codes and cards that can be turned off as needed (vacation mode)
 - Gaining access by entering a code and scanning a card (double authorization mode)
- Any code or card can be set up for single-entry and become invalid after one time use
 - Flexibility to choose the automatic relocking mode



X

Adjustable automatic relocking delay