

FAULTLESS®









Remote Control Electronic Deadbolt

25 YEAR MECHANICAL
WARRANTY
1 YEAR ELECTRONIC

ANSI GRADE 2



Features

-  **ANSI/BHMA Grade 2 security**
-  **Works with remote controls**
-  **Ideal for garage entry doors, home offices, computer rooms, utility rooms, etc.**
-  **Works with standard door preparations and can be installed with a screw driver in a few minutes without running wires**
-  **Back-up keyway override**
-  **Sturdy construction backed by 25 year mechanical and 1 year electrical warranty**
-  **Illuminated keypad**
-  **Low battery indicator**



Remote Control

Maximum operation distance:

50 ft . (15m)

Radio Frequency: 2.4 GHZ

Battery:

CR2032 Lithium-manganese Button Cell

Product Specification

Remote Control : 2 (Maximum capacity : 10 sets)

User codes : 4-6 digit number combination (Maximum capacity :10 sets)

Programming code : 6 digit number combination (only 1 set)

Key : 2

**Size (WxHxD) : Outer body : 2-3/4" x 5-11/16" x 1"
Inner body : 3-1/8" x 6-27/32" x 2-1/32"**

Finish : Satin Nickel, Aged Bronze, Bright Brass, Antique Brass

Door bored hole : 2-1/8"(54 mm) or 1-1/2"(38 mm)


Door thickness : 1-3/8"(35 mm) to 2"(51 mm)

Adjustable backset : 2-3/8"(60 mm) or 2-3/4"(70 mm)

Keypad LED color : Blue

Power : DC 6V (Four AA 1.5V alkaline batteries)

Operation temperature : -31°F to 150.8°F (-35°C to 66°C)


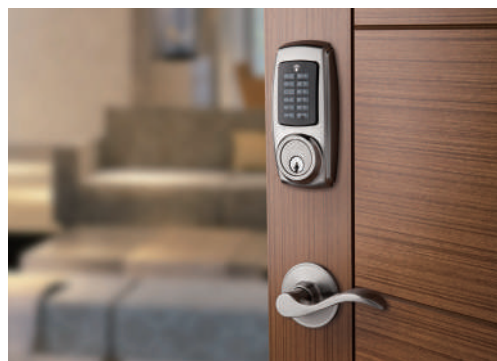


FAULTLESS®

Remote Control Electronic Deadbolt

25 YEAR MECHANICAL
WARRANTY
1 YEAR ELECTRONIC

ANSI GRADE 2

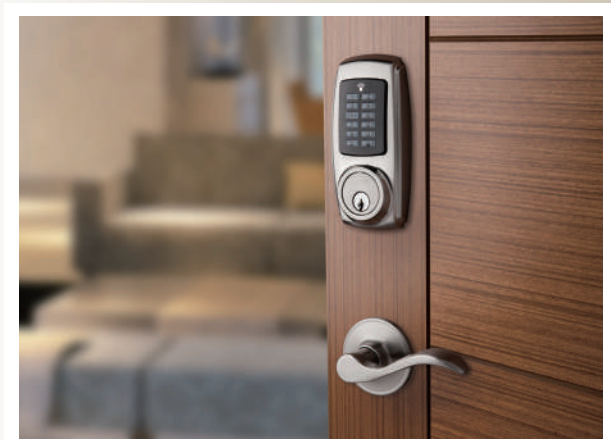

Remote Control



Keypad



Key

Special Functions



Automatic bolt direction determination (door handing)



Multiple user codes and remote controls that can be turned off as needed (vacation mode)



Gaining access by entering a code and using a remote control (double authorization mode)



Any code or remote control can be set up for single-entry and become invalid after one time use



Flexibility to choose the automatic relocking mode



Adjustable automatic relocking delay